




Technische Änderung vorbehalten.  
Subject to modification.

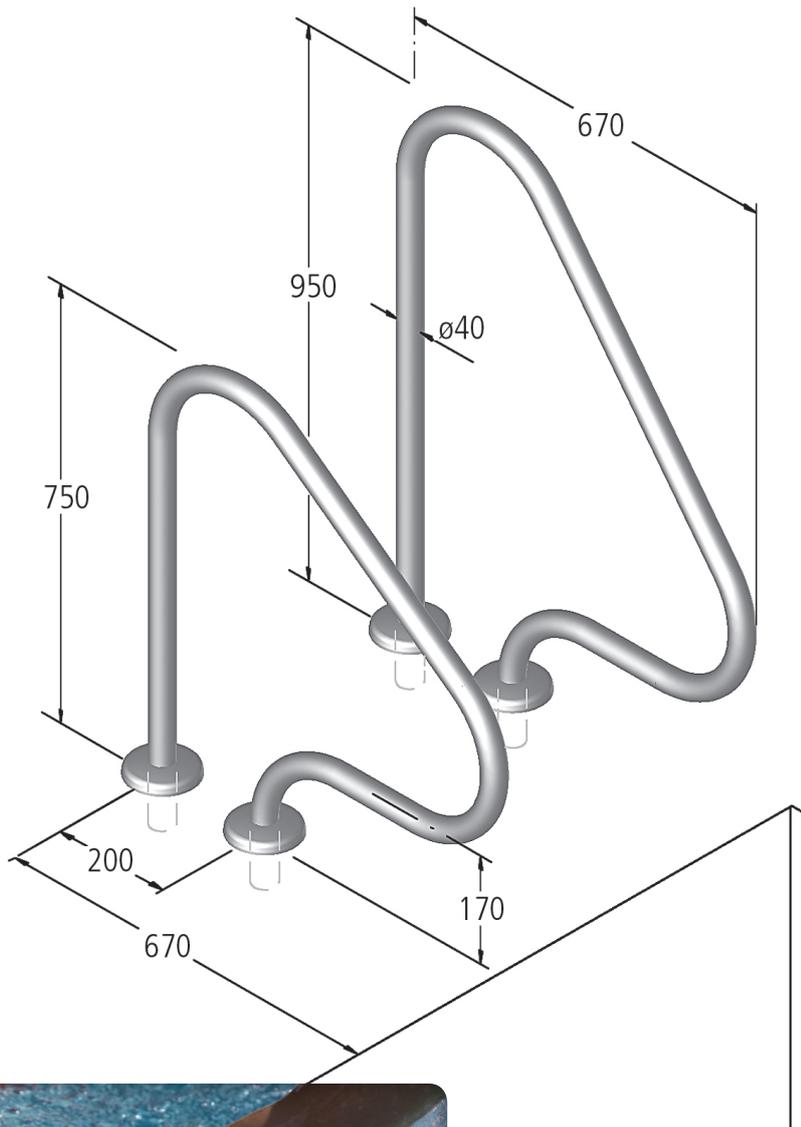

**SONDER-  
ANFERTIGUNGEN?**

Kein Problem - Beispiele siehe S. 92.

**SPECIAL CONSTRUCTIONS?**

No Problem -  
Examples see p. 92.

**MODELL 16.3 // GRIFFBOGEN TYP G****EINSATZBEREICH:**

Private und öffentliche Schwimmbäder

**BESCHREIBUNG:**

Edelstahl \*V4A\*, poliert, Holm ø40 mm,  
Höhe 750 mm,  
Höhe 950 mm,  
Ausladung hinter Beckenkante ca. 670 mm

Ausführung entsprechend diesem Maßblatt

**BEFESTIGUNG:**

In einzubetonierende Edelstahl-Steckhülsen,  
und zusätzlich Flanschmontage, inkl. Rosetten  
(Flansche ø97 mm/Lochkreis ø73 mm)

**MONTAGETEILE:**

Sind im Lieferumfang enthalten.

**BESTELLDATEN:**

Artikel-Nr. (siehe aktuelle Preisliste)

**BEI BESONDERER BESTELLUNG:**

Nur Flanschmontage ohne Steckhülse

Zulässige Chlorid-Ionen für Werkstoff V2A = 150 mg/l;  
für \*V4A\* = 400 mg/l

**MODEL 16.3 // GRABRAIL TYPE G****FIELD OF APPLICATION:**

Private and public pools

**DESCRIPTION:**

Stainless steel \*316\*, polished, bar ø40 mm,  
height 750 mm,  
height 950 mm,  
overhang behind the edge of the pool approx. 670 mm

construction corresponding to this drawing

**FASTENING:**

In stainless steel sockets, set in concrete  
and extra flange assembly incl. escutcheons  
(flanges ø97 mm/hole circle ø73 mm)

**ASSEMBLY MATERIALS:**

Are included in the scope of supply.

**ORDERING REFERENCES:**

Model number (see current price list)

**EXTRAS:**

Flange assembly only, without socket

Permissible chlorid-ions for material quality 304 = 150 mg/l;  
for \*316\* = 400 mg/l